




BACKLIT LED PANEL COLOUR CHANGING (CCT)

1200mm x 600mm

**Bright uniform light,
fits seamlessly into
any workplace**

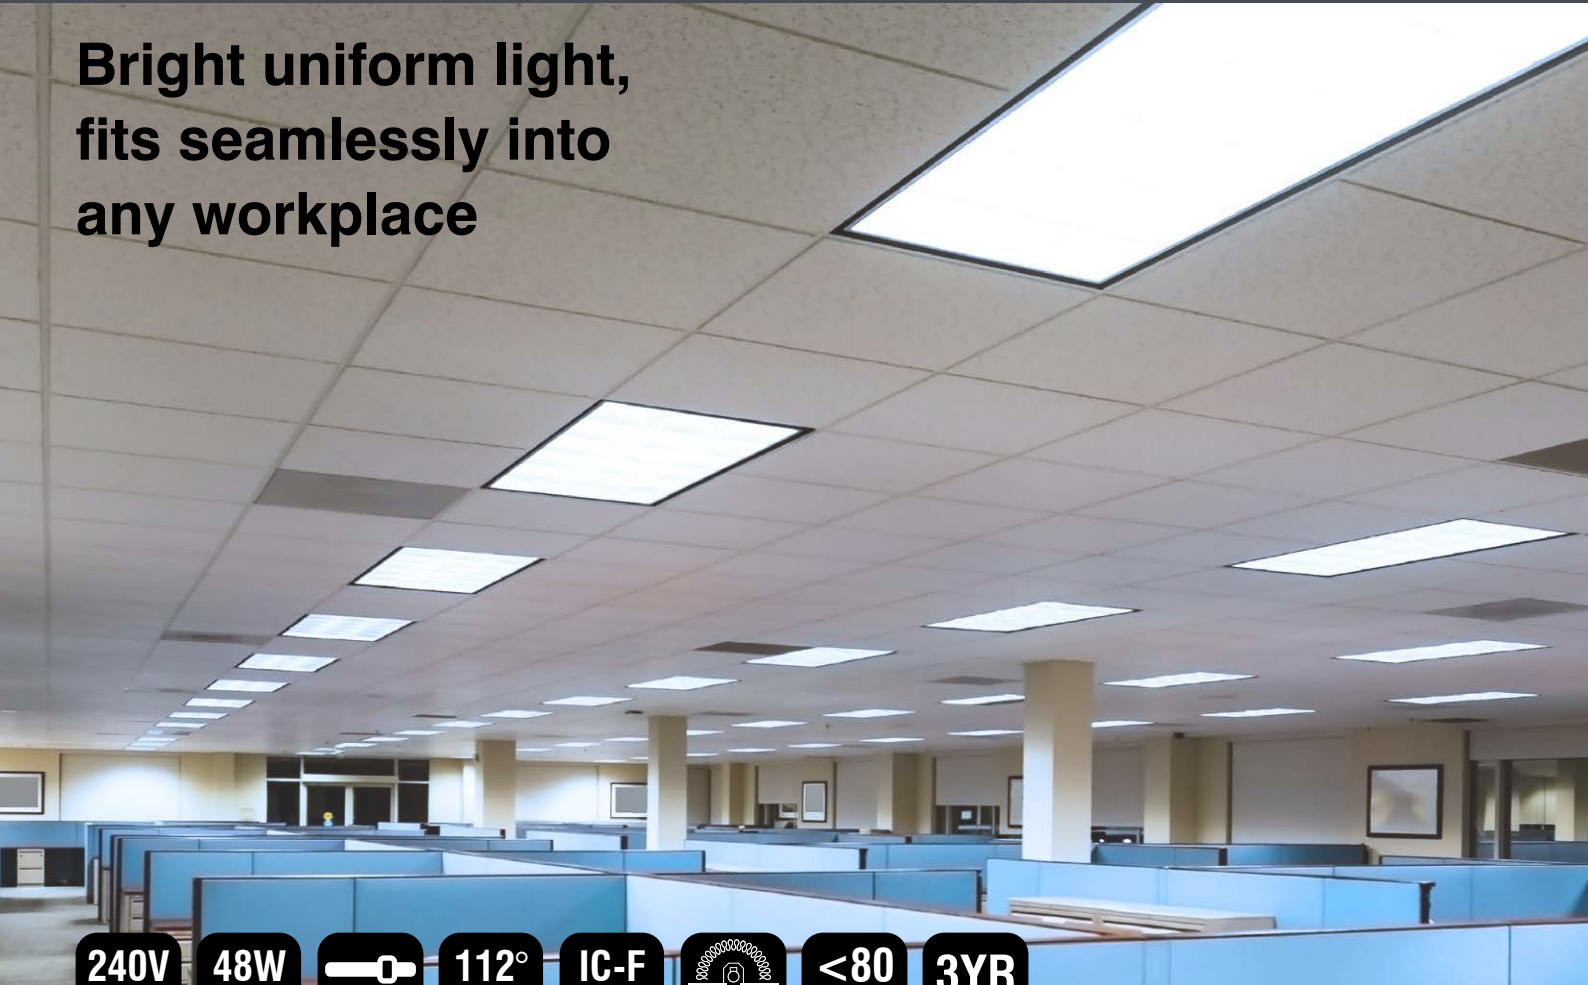

**240V
AC**

48W
5550lm

**TRI-COLOUR
CCT**

**112°
BEAM
SPREAD**

**IC-F
ABUTTED &
COVERED**

IC-4

**<80
CRI (Ra)**


**3YR
WARRANTY**

Our Backlit LED panels have an incredibly low profile, with a bright, uniform light distribution it is suitable for general illumination in commercial and residential applications.

- Backlit design provides higher efficiency at more than 100lm/W
- Ideal, low-maintenance solution for offices, schools, retail and healthcare application.
- Lightweight and easy to install.
- Easily change colour temperature (CCT) from warm white 3000K, cool white 4200K to bright daylight 6500K.
- Designed to fit standard T-Bar ceilings, Brilliant recessed plaster kit and surface mount kit.
- Long lasting up to 30,000 hours.
- External driver with flex & plug. (Total length 1.2 metre).
- Indoor use only.
- 3 Year Warranty.

APPLICATIONS

- Office & school lighting: office room, meeting room, class room.
- Commercial lighting: shopping mall, super market, retailer shops.
- Other applications: hospital, laboratory, dust-free workshop.

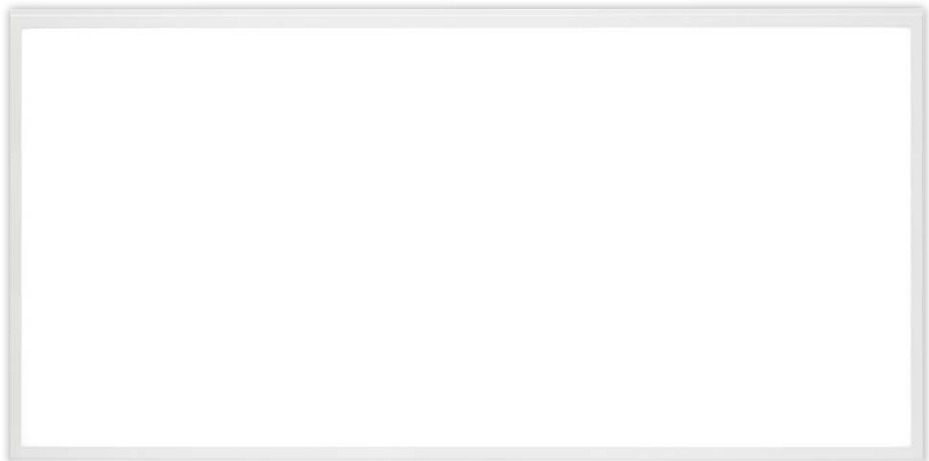



BACKLIT LED PANEL COLOUR CHANGING (CCT)


1200mm x 600mm



TECHNICAL SPECIFICATIONS

Operating voltage:	240V / 50Hz
Class:	Driver: Class II (2) Panel: Class III (3)
Wattage:	48W Total
Lumens:	5100 Total lumens (3000K) 5550 Total lumens (4200K) 5250 Total lumens (6500K)
Colour temperature:	3000°K (Warm white) 4200°K (Cool white) 6500°K (Daylight)
Beam angle:	112 degrees
Colour rendering index:	≥80
Power factor:	≥0.9
Dimmable:	No
Rated lifetime:	30,000hrs @25°C Ambient (When covered with thermal insulation)
Construction:	Aluminium (frame) Polycarbonate (diffuser)
Ingress protection:	IP20 (Indoor only)
Operating temperature:	TA: 25 degrees Celsius
Warranty:	3 year replacement
Standards:	AS/NZS 60598.1 AS/NZS 60598.2.2 CISPR15
Approvals	VEET: 8327 IPART: 17317D15-GBEIGEJF

INSTALLATION

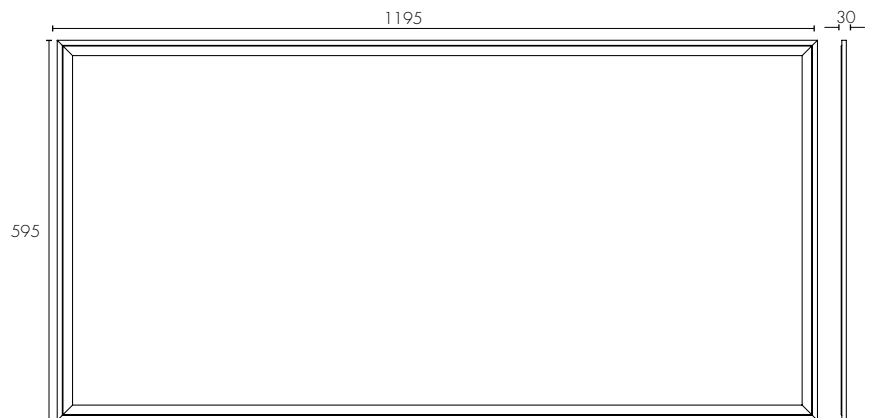Must be installed by a licensed electrician



	MODEL	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY	BARCODE/TUN
RETAIL BOX	21556/05	White	Backlit CCT LED Panel 1200x600mm	W1248 x H655 x D52 mm	3.00 kg	1 pc	 9 312641 215561 >
OUTER CTN	21556/05	White	Backlit CCT LED Panel 1200x600mm	W1250 x H220 x D630 mm	18. kg	4 pc	 19312641215568