

## Expo-35-Rec LED Recessed Downlight

















## Description

The Expo-35 Recessed Led Down light range is designed to offer Low glare lighting solutions to any commercial or residential application. Ideal for conference rooms, restaurants, hotels and living spaces. Featuring an aluminium deep-set body and high gloss mirror reflector, includes dimmable LED driver flex & plug, and also with TRIO, the added option of changing the colour temperature output.



Input Voltage: 240 V AC Power (W): 35W IP rating (IP): IP44

Lumens (lm): Warm White 3000K - 3650lm

Neutral White 4000K - 3750lm White 5700K - 3850lm

White 3/UUK - .

LED type: SMD

CCT: 3000K - 4000K - 5700K (Switchable)

CRI: ≥90

Beam angle (°): 80°

Dimmable: Yes


Lifespan (hrs): 50,000hrs

Cutout (p): Ø200-210mm





## Diagrams / Additional

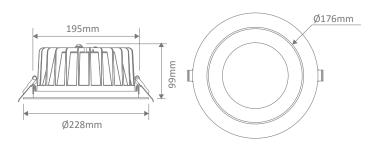

Cuttout: Ø200-210mm

## Item No. Variant Colour Temperature EXPO-35-REC-BLK 20714 TRIO EXPO-35-REC-WHT 20715 TRIO