



Replacement
Warranty*

40W TRICOLOUR LED BATTEN LIGHT WITH BATTERY BACKUP

TLDE34640



**ENERGY
EFFICIENT
TUBELESS
DESIGN**


This Tricolour LED batten features an energy efficient tubeless design as well as a shatter resistant polycarbonate diffuser and a Lithium-ion battery backup for emergency use. Making this batten ideal for use in carparks, garages, security areas, workshops, factories, industrial environments, stairwells, corridors, storage areas, schools and public amenities.

- **Lightweight powder coated aluminium housing**
- **Full fixture LED batten to replace twin fluoro T8 or T5's**
- **Surface mount directly to ceiling without visible brackets**
- **Shatter resistant polycarbonate diffuser**
- **40W Tricolour LED light**
- **Complete with Lithium-ion battery backup for emergency use**

Tricolour LED	40W 4000 LUMENS	Beam Angle 110°-130°	Non Dimmable	IP Rating IP 20	CRI ≥80	LED Emergency Tradetec	LIFEP04 Lithium-ion Battery Backup	Test Indicator & Test Button Functions


INCLUDES

Main body & screw pack

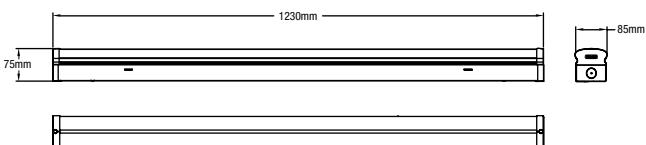


DIMENSIONS

AAI Figure



Luminous Intensity Distribution Diagram

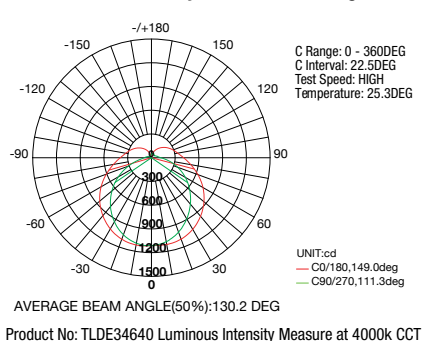

Aust/NZ Approval No.
EESS-190477-0



9312375506744



TLDE34640

40W TRICOLOUR LED BATTEN LIGHT WITH BATTERY BACKUP

FEATURES

- Surface mounted LED batten light
- Lightweight powder coated aluminium housing
- Shatter resistant polycarbonate diffuser
- Direct mounting (no brackets required)
- Provides excellent light distribution using Tricolour SMD LED technology
- Select either 3000k, 4000k, or 6500k light colour temperature setting
- Includes manual test and indicator light button
- Complete with Lithium-ion battery backup for emergency use
- Large terminal block for easy installation

SPECIFICATIONS

Model name	40W Tricolour LED Batten Light 1230mm Battery Backup
Model number	TLDE34640
Power (wattage)	40W
Voltage	220v-240v
Frequency	50Hz
Switchable Tricolour lumens	4000lm max
Colour temperature	3000k / 4000k / 6500k
LED light beam angle	110°-130°
Product size (mm)	1230 x 75 x 85
Material	Shatter resistant polycarbonate diffuser
LED Type	SMD LED
CRI	≥80
Approximate lamp life	30,000hrs
Weather resistance rating	IP20
Operating temperature	-20°C to +40°C
Battery type	Li+LiFEP04 6.4V 3.0Ah



INSTALLATION

Installation	By licensed electrician only
Warranty	2 year replacement warranty*

* For further information regarding warranty terms and conditions, please refer to enclosed warranty statement.


SHIPPING

Packaging size	1276 x 88 x 85mm
Gross weight	9.4kg
Carton qty	4

AVAILABLE IN WHITE



White

Model	Colour	Barcode
TLDE34620	White	 9312375506744