


# PFL1300BK PFL1300BZ

## MATERIAL / FEATURES

- Heavy Duty Cast Aluminium
- Heat Resistant Interchangeable Gasket and Lenses included: Clear Lens or Frosted Lens
- Includes (GS1) ABS Ground Stake, 1/2" NPT thread, slotted for ease of installation
- EPDM Rubber Bug Plug, prevents moisture/bugs from entering fixture
- Thumb Screw on knuckle for easy field adjustment
- "O" Ring Seal for added moisture protection
- Weather Resistant Powder Coat Finish - Aluminium

## SPECIFICATIONS

- 12 Volt Fixture
- 3' - #18/2 Direct Bury Landscape Lighting Wire
- Hi-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- Globe required – MR16 50 W Max or G4 35 W Max
- IP Rating: IP65

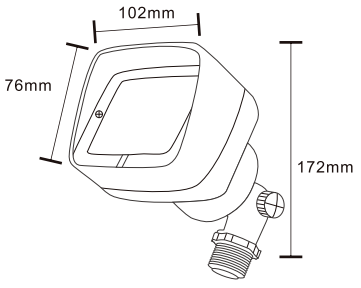

**PFL1300BK**



**PFL1300BZ**

PART NUMBER	Colour	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
PFL1300BK	Black				No globes supplied
PFL1300BZ	Bronze				No globes supplied
PFL1300BK/BZ-PLV5	Black/ Bronze	2700K	350	12V AC/DC	5W MR16 PLV5-MR16-FL-27K
PFL1300BK/BZ - PLXC5	Black/Bronze	2700K	400	12V AC/DC	5W MR16 PLXC5-MR16-FL-27K
PFL1300BK/BZ - PLV3G4	Black/Bronze	2700K	230	12V AC/DC	3.5W G4 Bi Pin PLV3-G4-27K