



## 380 Series


### VBLDL-383-1-40



Vibe 9W LED Adjustable Dimmable Downlights are a highly functional commercial lighting solution, featuring a unique internal rotatable design and can be fitted with a range of accessories. Comes equipped with CITIZEN LED chips, a 50,000 hour lifespan and 5 year warranty.

### Features & Benefits

- Architecturally designed fitting
- Unique internal rotatable design
- Equipped with CITIZEN LED chips
- Dimmable Tridonic driver suitable for most trailing edge and universal dimmers
- Can be fitted with a range of accessories
- Standard 50° Beam angle -15°, 24°, 36° optional
- Standard with white reflector (optional black, chrome and gold reflectors available)
- 50,000 hour lifespan
- 5 year warranty

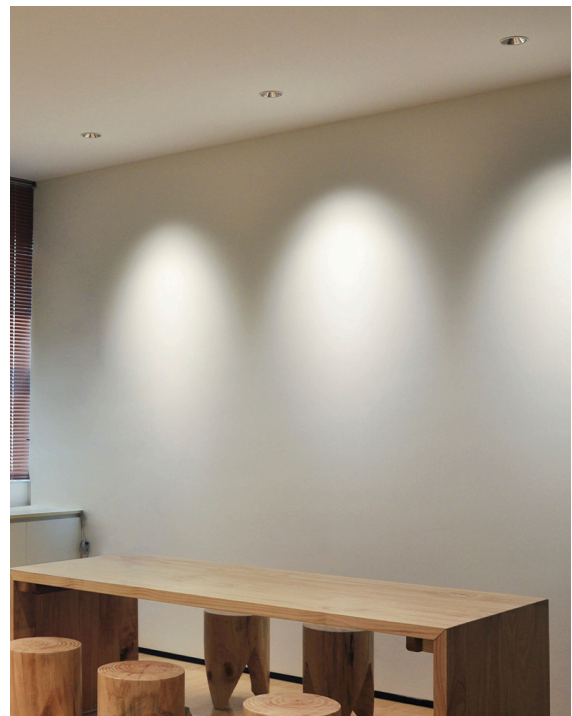


## Specifications

|                            |  |
|----------------------------|--|
| <b>SKU</b>                 | VBLDL-383-1-40   |
| <b>Luminaire efficacy</b>  | 102 lm/W   |
| <b>EAN</b>                 | 9340994409986  |
| <b>Light Colour</b>        | Cool White   |
| <b>Wattage</b>             | 9 W  |
| <b>Lumen output</b>        | 918 lm   |
| <b>IP rating</b>           | 20   |
| <b>CRI</b>                 | 90   |
| <b>Beam Angle</b>          | 50 Degrees   |
| <b>Trim colour</b>         | White  |
| <b>Cut out</b>             | 90 mm  |
| <b>Diameter</b>            | 100 mm   |
| <b>Lifespan</b>            | 50000 Hours  |
| <b>Warranty</b>            | 5 Years  |
| <b>Dimmable</b>            | Dimmable   |
| <b>Mounting type</b>       | Recessed   |
| <b>LED source</b>          | Citizen  |
| <b>Accessories</b>         | Also available in 3000K. Can accessorise with Black, Chrome or Gold Trim, and/or Honeycomb Lens. |
| <b>Lamp Type</b>           | LED  |
| <b>Dimming</b>             | Triac Dimming  |
| <b>Input voltage</b>       | 220V-265V AC 50hz  |
| <b>Wiring method</b>       | Flex & Plug or Hardwire  |
| <b>Weatherproof</b>        | Indoor Use Only  |
| <b>Working temperature</b> | -20°C ~ 45°C   |
| <b>Kelvin</b>              | 4000K  |



## Dimensional Drawings

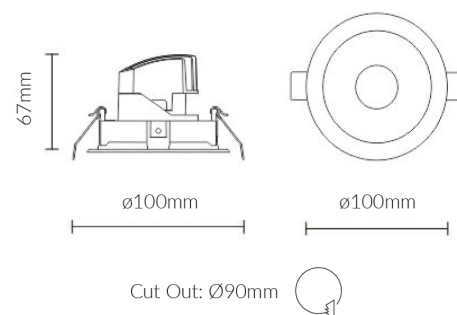

Photometric information available upon request.